



# IDRA II

## INSTALLATION GUIDE

# CONTENTS

---

**1. Important information** P. 3

---

**2. Package contents** P. 4

---

**3. Required specs** P. 5

---

**4. Hardware installation guidelines** P. 6-10

---

**5. Software installation guidelines** P. 11

---

**6. Understanding your performance data** P. 12-14

---

# 1. IMPORTANT INFORMATION

---



## WARNING

**PLEASE READ  
THE FOLLOWING  
BEFORE USE.**

**FAILURE TO FOLLOW  
THE INSTRUCTIONS  
COULD RESULT IN  
SERIOUS INJURY,  
PROPERTY DAMAGE,  
AND/OR VOID THE  
DEVICE WARRANTY.**


1. The IDRA II mounting plate is designed specifically for mounting an IDRA II launch monitor to a ceiling. Do NOT attempt to mount additional items to the provided mount, as the additional weight may result in damage and/or failure.
2. Do NOT install IDRA II in a location where vibration or impact shock may occur. This may result in damage to or failure of the launch monitor.
3. Install in a level and stable location. Failure to do so may result in falling of the launch monitor, leading to injury.
4. Prior to installing IDRA II, make sure the ceiling area is strong enough to hold a minimum of 20 pounds. If the ceiling area is not strong enough, reinforce the area prior to installation.
5. Do NOT install IDRA II in a location where its operating temperature may be exceeded. Excessive temperatures may damage the launch monitor. Recommended operating temperature range is 0°C – 50°C (32°F – 122°F).
6. Install IDRA II in a place free of excessive dust and humidity to prevent the lens or optical components of IDRA II from becoming clouded or dirty. The recommended humidity level for the room is 30 to 65%.
7. Do NOT attempt to disassemble, repair, or modify IDRA II. Doing so may result in fire, electrical shock, or injury. Contact our support team if any problems occur with the launch monitor.
8. Make sure the hitting zone is not located in direct sun exposure.
9. Be aware of your surroundings and use cautiously with children around.
10. Do NOT install IDRA II outside. This device is only designed for indoor use.
11. Do NOT touch the LED light as it may cause burns, and avoid looking directly at the light to prevent potential eye damage.

## 2. PACKAGE COMPONENTS


---



**IDRA II launch monitor with power cable and two USB camera cables (1x)**

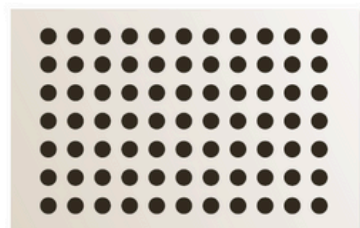

**Calibration board (1x)**

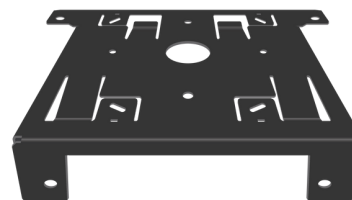

**Mounting plate (1x)**



For illustration purposes only. Model may vary.

**Wireless remotely operated switch (1x)**  
(Only included in North America)



**Tightening screw (2x)**



**3" Phillips screws for wood (4x) (Optional)**



**Anchors for 1/2" drywall (4x) (Optional)**



**1" Phillips screws for drywall (4x) (Optional)**



**USB Hub**

### **Equipment needed** (not included)

- Drill (for drywall anchors)
- Ladder
- Phillips screwdriver
- Pencil

# 3. REQUIRED SPECS

## PC Specifications

### With GSPRO

Requirement	Minimum	Recommended
Processor	Intel i7 10th Gen + 16 logical processors	<b>Intel i7 10th Gen + 24 logical processors</b>
Storage	512 GB	<b>1 TB</b>
GPU	Nvidia GeForce RTX 20 series	<b>Nvidia GeForce RTX 40 series</b>
RAM memory	16 GB	<b>32 GB</b>
USB Ports	2 USB 3.0 ports are required	
Internet	High-speed Internet is required	

### With E6 CONNECT

Requirement	Minimum	Recommended
Processor	Intel i7 10th Gen + 16 logical processors	
Storage	512 GB	
GPU	Nvidia GeForce RTX 20 series	<b>Nvidia GeForce RTX 30 series</b>
RAM memory	16 GB	
USB Ports	2 USB 3.0 ports are required	
Internet	High-speed Internet is required	



**WARNING**

**AMD PROCESSORS ARE NOT SUPPORTED.**

**DO NOT USE USB CABLE EXTENSION BETWEEN YOUR PC AND YOUR IDRA II CAMERA.**

## 4. HARDWARE INSTALLATION GUIDELINES

---

### Installing the bracket

The IDRA II Camera and mount bracket come attached together in the box.


1. Remove the tightening screws (illustration 1) and slide out the mount bracket from the camera (illustration 2).

**Illustration 1**



**REMOVE THE SCREW**

**Illustration 2**

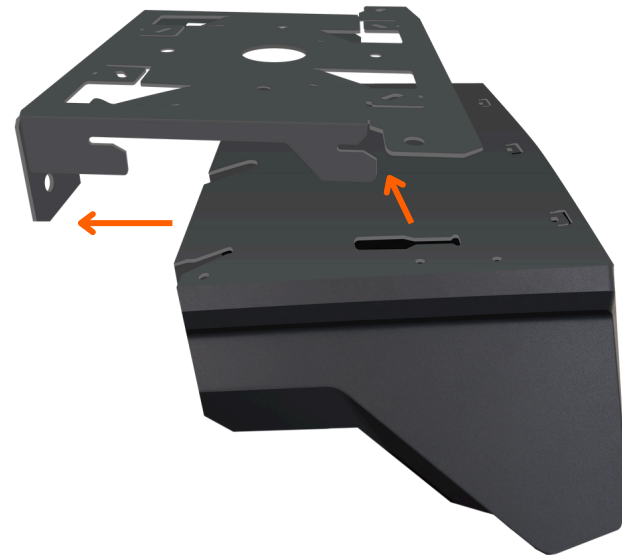

**SLIDE OUT MOUNT BRACKET**

## 4. HARDWARE INSTALLATION GUIDELINES


---

### Installing the bracket


2. Fix the bracket **parallel to the impact screen, flat and level (very important)** against the ceiling. Use the provided screws (screws for wood or anchors and screws for ½" drywall depending on your need). Screw them in the appropriate locations (illustration 3).

Refer to the diagram on the next page for the adequate position according to the height of your ceiling (illustration 4).

**Illustration 3**

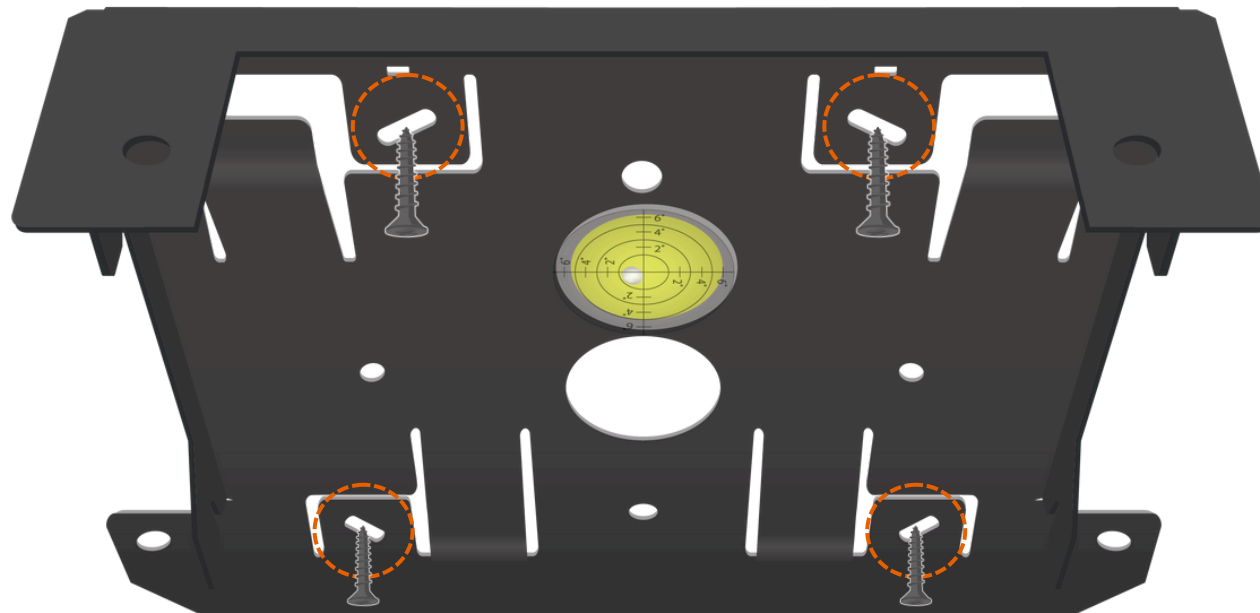

## Illustration 4

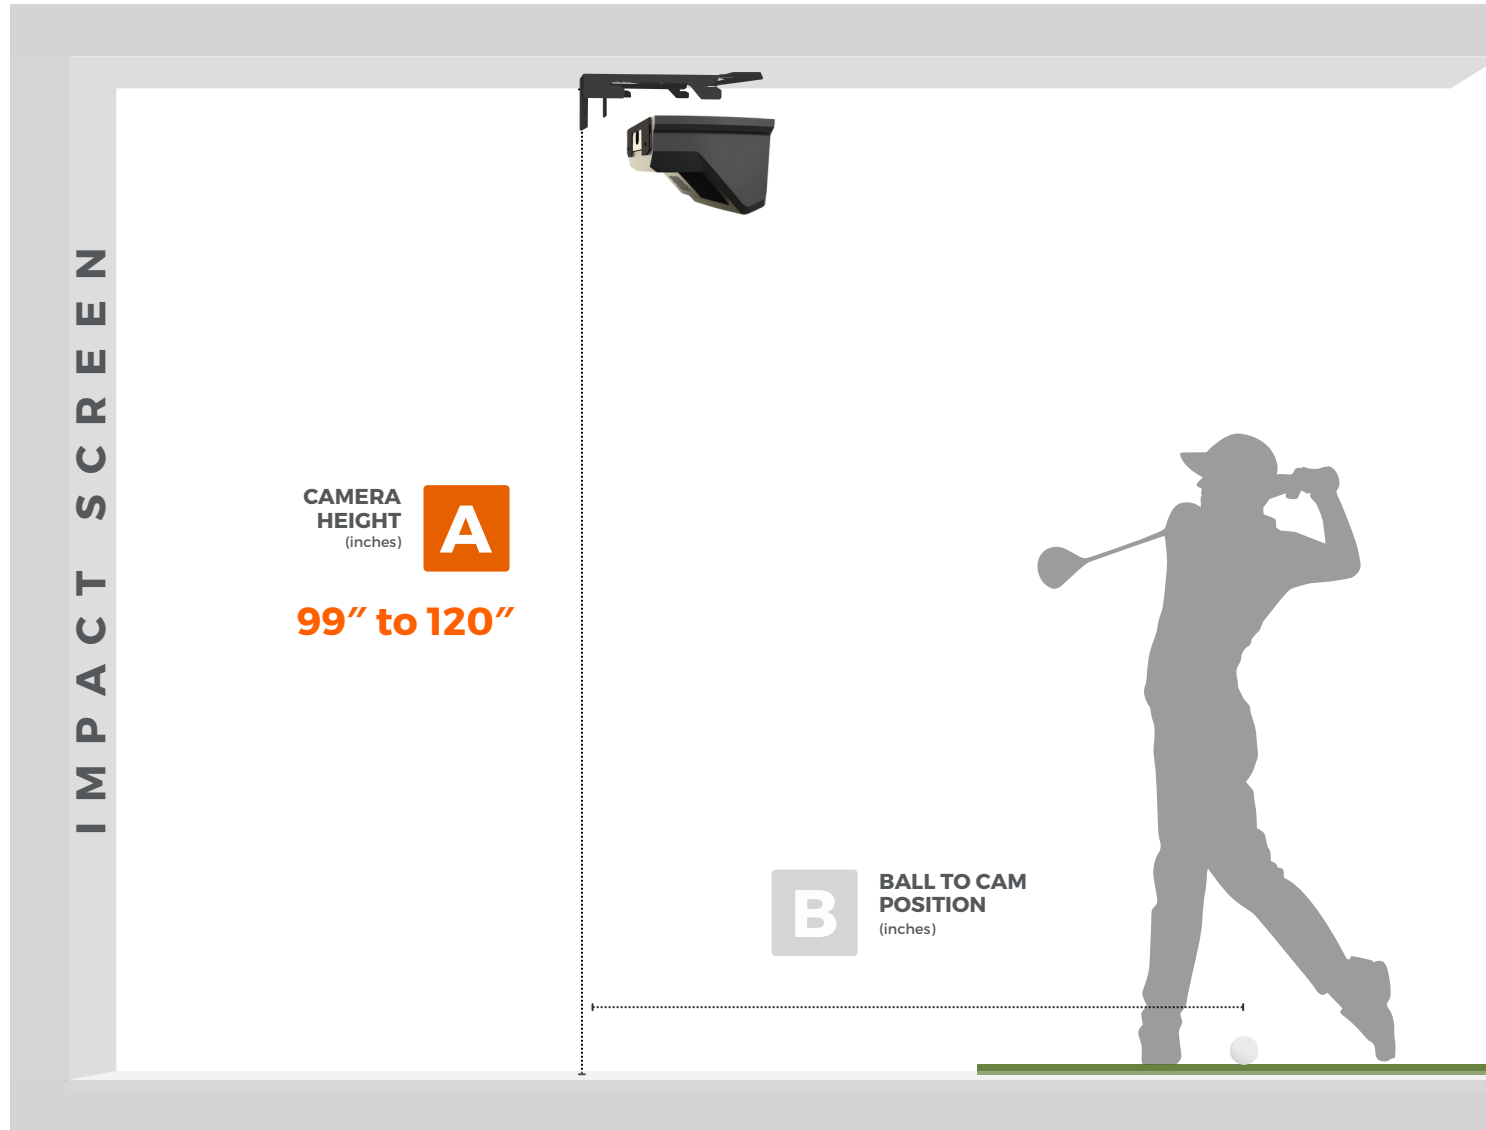

A	B
Camera Height (inches)	Ball to cam position (inches)
99	47 3/4
100	48 1/4
101	48 3/4
102	49 1/4
103	49 3/4
104	50 1/8
105	50 5/8
106	51 1/8
107	51 5/8
108	52 1/8
109	52 5/8
110	53 1/8
111	53 1/2
112	54
113	54 1/2
114	55
115	55 1/2
116	56
117	56 1/2
118	56 7/8
119	57 3/8
120	57 7/8

**B IS MEASURED FROM THE BACK OF THE MOUNTING PLATE TO THE POSITION OF THE BALL.**




## 4. HARDWARE INSTALLATION GUIDELINES

---

### Sliding the IDRA II camera back into the mount

3. Slide the IDRA II camera into the bracket (illustration 5) and fix the two screws in the back of the bracket (illustration 6).

**Illustration 5**

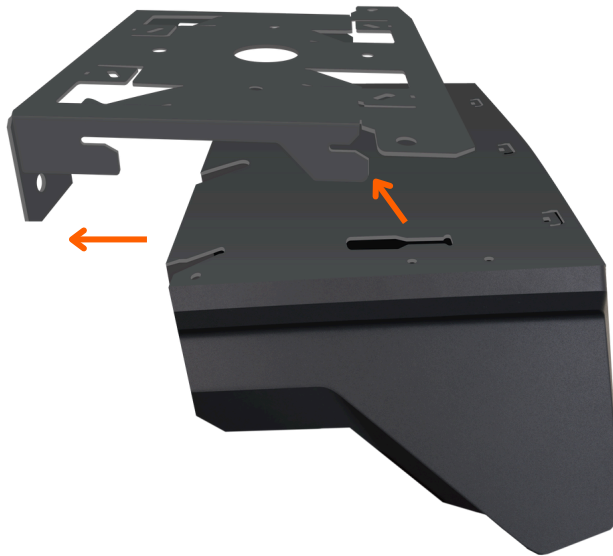

**SLIDE THE CAMERA  
INTO THE BRACKET**

**Illustration 6**



**FIX THE TIGHTENING  
SCREWS IN THE BRACKET**

## 4. HARDWARE INSTALLATION GUIDELINES

---

### Cable connections

Connect the power cable (country-specific) to the wireless remotely operated switch. Connect your wireless remotely operated switch to your electrical outlet. Plug the two USB camera cables to your 3.0 USB SS port on your PC (illustration 7).

Illustration 7



---

The PC must be positioned within a maximum of 25 feet from IDRA II.

---

## 5. SOFTWARE INSTALLATION

---

### Golfln launcher installation and IDRA II calibration

Follow these steps to complete your installation:

1. Ensure your computer is connected to the Internet.
2. Confirm that you have purchased the necessary software. IDRA II is compatible with the following software:
  - **GSPro**
  - **E6 Connect**
3. Visit [www.teamviewer.com](http://www.teamviewer.com), download, and install the latest version of TeamViewer Host.
4. Schedule an appointment with the Golfln Support Team on the day of installation to finalize the setup and configuration of your IDRA II camera.

**CLICK HERE TO  
BOOK AN  
APPOINTMENT**



<https://outlook.office365.com/owa/calendar/RSPTechnicalAssistance@golflnsim.com/bookings/>

## 6. UNDERSTANDING YOUR DATA


---

### Club data



#### CLUB FACE TO TARGET

The direction in which (right or left) the club face is pointed at impact. It is measured relative to the target line.



#### CLUB FACE TO PATH

The direction in which (right or left) the club face is pointed at impact. It is measured relative to the club path line.



#### CLUB FACE TO IMPACT

The position of the ball from heel to toe on the clubhead at impact.



#### CLUB SPEED

Club Speed is the speed in which the club head is traveling immediately prior to impact.



#### CLUB PATH

The in-to-out or out-to-in movement of the clubhead's geometric center at the time of impact. Club Path is the direction in which (right or left) the clubhead is moving at impact and is measured relative to the target line.




#### SMASH FACTOR

The efficiency of the energy transfer from the clubhead to the golf ball. It is calculated by dividing the ball speed by the clubhead speed.

## 6. UNDERSTANDING YOUR DATA


---

### Ball flight data



#### CARRY (GAME)

The distance a golf ball travels from the point of impact to the point where it first hits the ground, accounting for factors like wind, elevation changes, or course conditions.



#### CARRY (RAW)

The distance a golf ball travels from the point of impact to the point where it first hits the ground without accounting for factors like wind, elevation changes, or course conditions.



#### TOTAL DISTANCE

The complete distance a golf ball travels from the point of impact to its final resting place. This includes both the carry distance and the roll distance along the ground after landing.



#### BALL DIRECTION

The initial direction of the ball relative to the target line.



#### BALL DEVIATION

The amount a golf ball strays from its intended path, caused by swing path, clubface angle, wind, or spin. Ball deviation is often described as a hook, slice, draw, or fade.



#### BALL SPEED

Ball Speed is the speed of the golf ball immediately after impact.

## 6. UNDERSTANDING YOUR DATA

---

### Ball flight data




#### LAUNCH ANGLE

The angle at which the ball takes off relative to the horizon.



#### PEAK HEIGHT

The maximum vertical height a golf ball reaches during its flight.



#### DESCENT ANGLE

The angle at which a golf ball descends towards the ground after reaching its peak height.



#### SIDE SPIN

The rotation of the ball around its vertical axis, causing it to curve to the left or right during flight.



#### BACK SPIN

The rotational spin applied to a golf ball that causes it to rotate backwards as it travels through the air.



#### SPIN AXIS

The line around which the ball rotates during its flight. It determines the direction and amount of curve the ball will exhibit.

IDRA<sup>®</sup>  
BY GOLF 