

IDRA II  
SPEC  
SHEET

# CONTENTS

DIMENSIONS AND WEIGHT P. 3

---

WHAT'S INCLUDED P. 3

---

PC SPECS REQUIREMENTS P. 4

---

POSITIONING SPECIFICATIONS P. 5

---

## DIMENSIONS AND WEIGHT



WEIGHT: 14.4 LBS

- A** WIDTH: 13 5/16"
- B** HEIGHT: 7 1/4"
- C** DEPTH: 9 5/8"

---

Ensure that you have sufficient space to comfortably swing your club in your chosen area.

---

## WHAT'S INCLUDED

- IDRA II camera
- Calibration board
- IDRA II ceiling mount
- Wireless remote control outlet (Only included in North America)
- 1/2" drywall plastic toggle anchors (4)
- 1" head Phillips/square drive screws (4)
- 3" head Phillips/square drive screws (4)
- 2 years warranty

## PC SPECS REQUIREMENTS

### WITH GSPRO

#### Processor

**Minimum**

Intel Core i7, 10th Gen, with at least 16 logical processors

**Recommended**

Intel Core i7, 10th Gen or newer, with at least 24 logical processors

#### Storage

**Minimum**

512 GB

**Recommended**

1 TB

#### USB Ports

2 USB 3.0 & 1 USB-C ports are required

#### GPU

**Minimum**

Nvidia GeForce RTX 20 series

**Recommended**

Nvidia GeForce RTX 40 series or newer

#### RAM memory

**Minimum**

16 GB

**Recommended**

32 GB

#### Internet

High speed internet is required

### WITH E6 CONNECT

#### Processor

**Minimum & recommended**

Intel Core i7, 10th Gen or newer, with at least 16 logical processors

#### Storage

**Minimum & recommended**

512 GB

#### USB Ports

2 USB 3.0 & 1 USB-C ports are required

#### GPU

**Minimum**

Nvidia GeForce RTX 20 series

**Recommended**

Nvidia GeForce RTX 30 series

#### RAM memory

**Minimum & recommended**

16 GB

#### Internet


High speed internet is required



### WARNING

- AMD processors & GPUS are NOT supported.
- DO NOT use USB cable extension between your PC and your IDRA II camera.

# POSITIONING SPECIFICATIONS

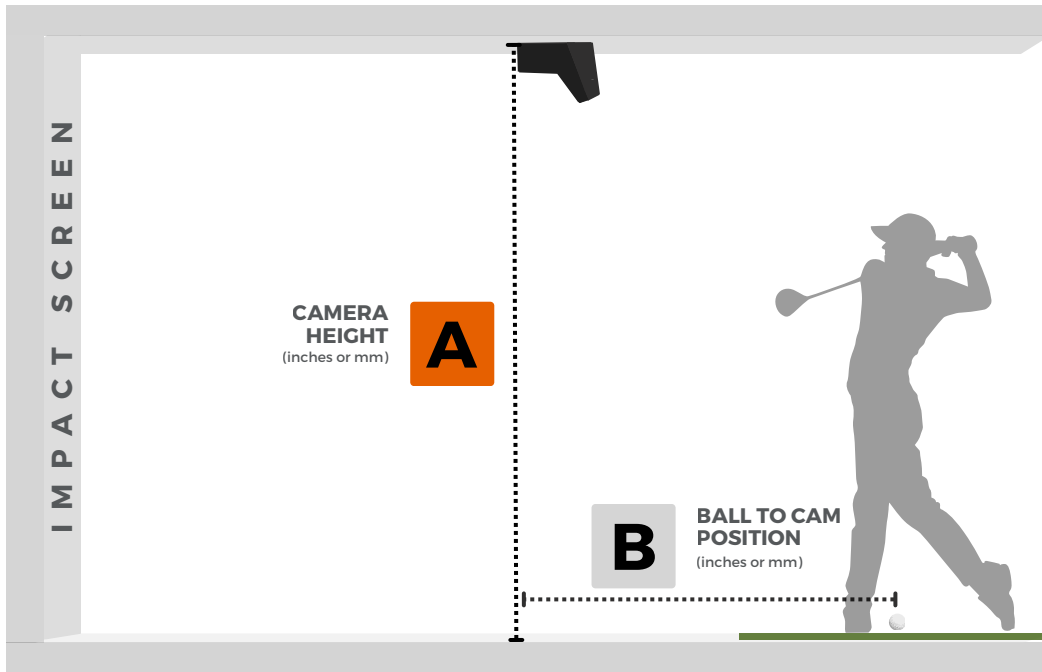

A		B	
Camera Height (inches)	Camera Height (mm)	Ball to cam position (inches)	Ball to cam position (mm)
99	2515	52	1320
100	2540	52 1/2	1333
101	2565	53	1346
102	2591	53 1/2	1360
103	2616	54	1373
104	2642	54 5/8	1386
105	2667	55 1/8	1400
106	2692	55 5/8	1413
107	2718	56 1/8	1426
108	2743	56 5/8	1440
109	2769	57 1/4	1453
110	2794	57 3/4	1466
111	2819	58 1/4	1479
112	2845	58 3/4	1493
113	2870	59 1/4	1506
114	2896	59 7/8	1519
115	2921	60 3/8	1533
116	2946	60 7/8	1546
117	2972	61 3/8	1559
118	2997	61 7/8	1573
119	3023	62 1/2	1586
120	3048	63	1599

The PC must be positioned within a maximum of 25 feet from IDRA II.